


Technical Parameters

Model	BLD-5730-4
LEDs	5730 SMD LED
Light Color	R/G/B/Y/W/CW/WW
Beam Angle	120°
LED Qty	4pcs
Luminous Flux	220lm/pcs
CCT	W: 6000~7000K ; WW: 2700~3300K ; CW: 9000-12000K
Input Voltage	DC12V
Power Consumption	2W
Drive Method	Constant Voltage
Connection	20pcs
Cases	ABS material ; anti-UV; flame retardant ,anti-static
Dimension	54.8*33.2*5.9mm
Installation	Adhesive tape and M3 screw
Ingress Protection	IP65
Operating Temp	-30°C ~ +60°C
Storage Temp	-40°C ~ +80°C

The tech-specification may be changed because of the technology improvement.

Connection

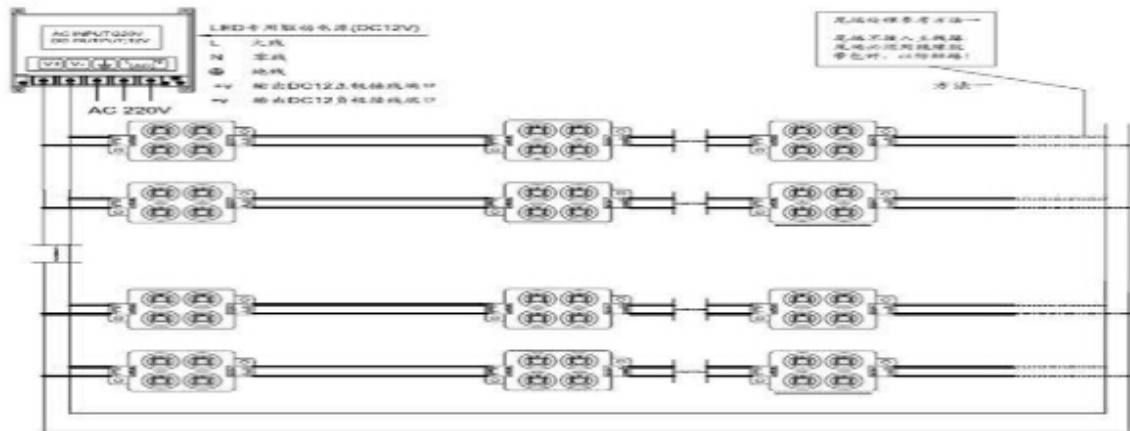


Application

- Backlighting of light boxes
- Backlighting of letters
- Signage and illuminated advertising

Features:

- One BLD-5730-4 plus module chain comprises 20pcs individual modules
- Three LEDs per module
- Ingress protection IP65
- Pre-mounted adhesive tape and screw allows easy mounting
- 12V DC power supply
- Integrated heat sink solution
- Lighting colors:W/RGB/Y for optional
- Original LG ABS cases material

Dimension (unit: mm):

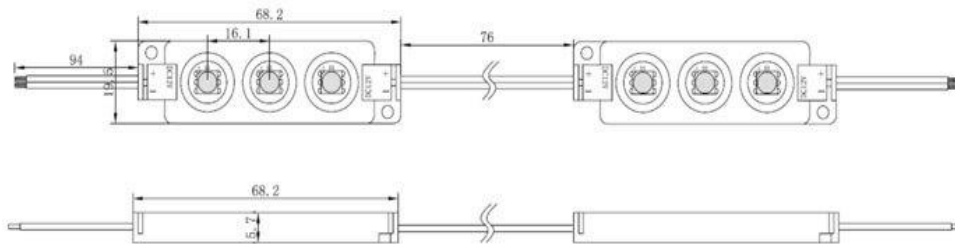

Notes:

1. Power wire should be $\leq 5m$.
2.20pcs modules per chain maximum.
- 2.

Usage



1, Clean the surface



2 put Two-face Adhesive on




3, Arrange the modules in order



4, Fasten the module with bolt



5, Cut off the odds and fix wires

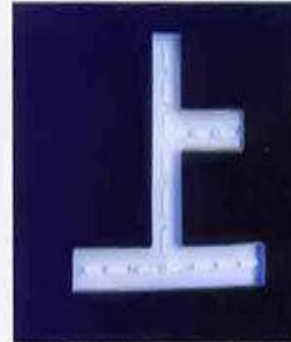

6, power with Switch Power Supply and test




Application



LED module used for lighting channel letter making:



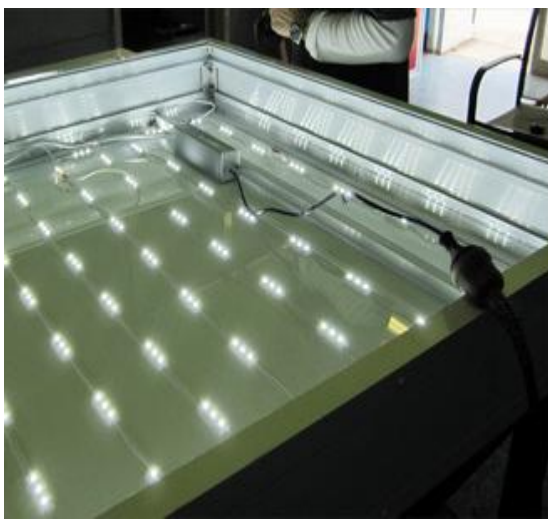



Process





product certification:

产品认证：CE FC ROSH