


Features:

- \* 8mm Level Top And With Flange Lamp LED
- \* Emitting Color Red Green Blue
- \* Low Power Consumption
- \* Ideal For Backlight Toy Light-Gift Indicator

Circuit and Package Dimensions

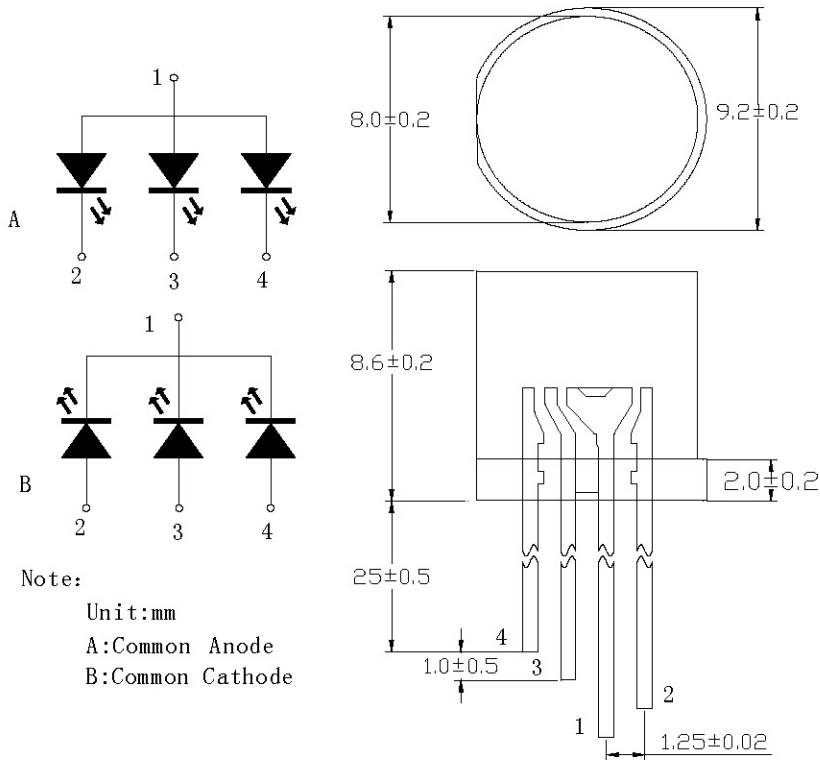

Note:  
Unit:mm  
A:Common Anode  
B:Common Cathode

Absolute Maximum Rating

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	$I_F$	20	mA
Peak Forward Current*	$I_{FP}$	100	mA
Reverse Voltage	$V_R$	5	V
Reverse Current	$I_R$	10	uA
Power Dissipation	$P_d$	150	mW
Electrostatic discharge	$E_{SD}$	800	V
Operation Temperature	$T_{OPR}$	-25~+80	°C
Storage Temperature	$T_{STG}$	-5~+45	°C
Lead Soldering Temperature	$T_{SOL}$	Max. 260°C for 5sec Max(3mm from the base of the epoxy bulb)	

Typical Optical/Electrical Characteristics

Product Type	Lens Color	Emitting Color	Forward Voltage (v)		Prcep Wavelength (nm)		Luminous Intensity (mcd)		50% Power Angle (deg)
			Type	Max.	Type.	Max.	Min.	Type	Type
J802RGG2A	White Diffused	R	1.80	2.40	630	640	200	300	120
		G	3.20	3.60	515	525	800	1000	
		B	3.20	3.60	465	475	400	600	
J802RGG2C	White Diffused	R	1.80	2.40	630	640	200	300	120
		G	3.20	3.60	515	525	800	1000	
		B	3.20	3.60	465	475	400	600	